

1" BSP Nicrofer® - 3220

ALLOY 800 ELEMENT

232 kW/m² SERIES

WATTS	PENETRATION	PART No. INDIVIDUALLY PACKED	FORM
1200	205 mm	3252AG612	HAIRPIN
1500	205 mm	3252AG615	HAIRPIN
1800	205 mm	3252AG618	HAIRPIN
2000	225 mm	3252AG620	HAIRPIN
2400	260 mm	3252AG624	HAIRPIN
3600	205 mm	3252AG736	FOLDBACK
4800	260 mm	3252AG748	FOLDBACK



HAIRPIN

155 kW/m² SERIES

BULK ONLY →	2400	205 mm	SEE SECTION 15-4-4	FOLDBACK
--------------------	------	--------	---------------------------	----------

130 kW/m² SERIES

BULK ONLY →	2000	205 mm	SEE SECTION 15-4-4	FOLDBACK
--------------------	------	--------	---------------------------	----------

116 kW/m² SERIES

WATTS	PENETRATION	PART No. INDIVIDUALLY PACKED	FORM
900	205 mm	3267AG609	HAIRPIN
1200	245 mm	3267AG612	HAIRPIN
1500	295 mm	3267AG615	HAIRPIN
1800	200 mm	3267AG718	FOLDBACK
2000	215 mm	3267AG420	FOLDBACK
2400	245 mm	3267AG724	FOLDBACK
2400	470 mm	HQ0262	HAIRPIN
3000	295 mm	3267AG730	FOLDBACK
3600	345 mm	3267AG736	FOLDBACK
4800	445 mm	3267AG748	FOLDBACK



FOLDBACK

BULK ONLY →




**KH35B0
1" BSP
TERMINAL COVER**

GASKET		
	KQ99Q0	1" BSP GASKET

BSP ELEMENTS

120 kW/m²

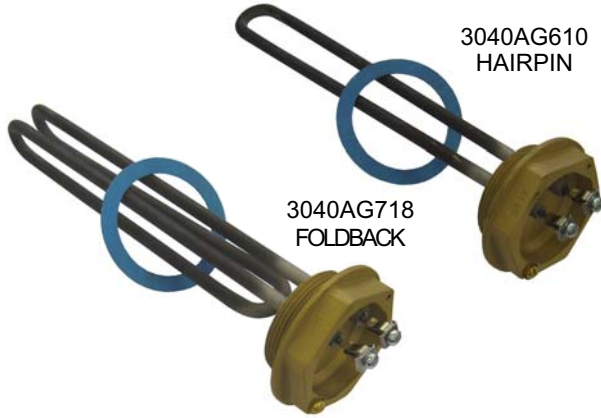

KB40 SERIES 2" BSP

WATTS	PENETRATION	PART No. INDIVIDUALLY PACKED	FORM
1200	210 mm	3040AG609	HAIRPIN
1500	265 mm	3040AG610	HAIRPIN
2400	220 mm	3040AG715	FOLDBACK
3000	270 mm	3040AG718	FOLDBACK
3600	320 mm	3040AG719	FOLDBACK
4800	420 mm	3040AG721	FOLDBACK



KB39 SERIES 1 1/4" BSP

WATTS	PENETRATION	PART No. INDIVIDUALLY PACKED	FORM
900	200 mm	3039AG607	HAIRPIN
1200	235 mm	3039AG609	HAIRPIN
1500	285 mm	3039AG610	HAIRPIN
2400	247 mm	3039AG715	FOLDBACK
3000	298 mm	3039AG718	FOLDBACK
3600	349 mm	3039AG719	FOLDBACK

BOLT-ON ELEMENT



KB38 SERIES 2 1/2" BOLT ON

WATTS	PENETRATION	PART No. INDIVIDUALLY PACKED	FORM
3600	370 mm	3038AG719	

SINGLE PHASE TYPES: Nicrofer® 3220 - ALLOY 800

1 1/4" BSP 240 VOLTS 77.5 kW/m² SHEATH LOADING



Small sized industrial immersion heater for water heating where long element life is required. Thermostat pocket fitted.

PART No.	WATTAGE	PENETRATION
KH39A000	1200W	210mm
KH39B000	1800W	235mm
KH39C000	2400W	260mm

2" BSP 240 VOLTS 31 kW/m² SHEATH LOADING



PART No.	WATTAGE	PENETRATION
KH41A000	1500W	500mm
KH41B000	2400W	600mm

Lower power density sheath loadings for use where heat sensitive solutions are being heated or where build up of solids on the element sheath is likely. Thermostat pocket fitted. Not suitable for alkali solution.

**2" Terminal Cover
RF0700/S**



**1 1/4" Terminal Cover
KH35A0**



This page intentionally left blank – more new products coming soon

Check out the on line catalogue at www.grimwoodheating.com.au for the latest